


PLAN

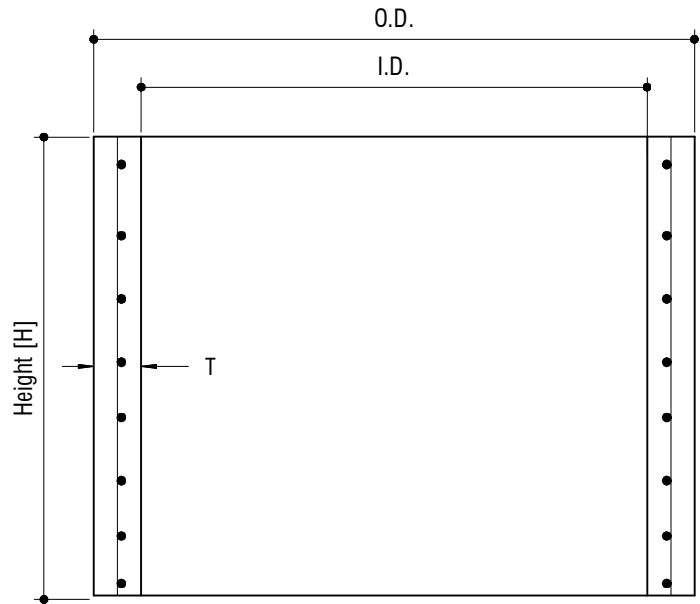

SECTION

RISER SCHEDULE:

<u>Description:</u>	<u>ID:</u>	<u>OD:</u>	<u>H:</u>	<u>T:</u>
Std. Meter Vault	18"	22"	30"	2"
24" Meter Vault	24"	27"	30"	1 1/2"
24 x 6" Riser	24"	27"	6"	1 1/2"
24 x 12" Riser	24"	27"	12"	1 1/2"
24 x 30" Riser	24"	27"	30"	1 1/2"
24 x 36" Riser	24"	27"	36"	1 1/2"
30 x 12" Riser	30"	34"	12"	2"
30 x 30" Riser	30"	34"	30"	2"

DESIGN DATA & GENERAL NOTES

- [1] Concrete strength $f_c=4,000$ p.s.i. @ 28 days. Density = 150 pcf.
- [2] Cement - Portland Type I/II per ASTM C 150-92.
- [3] Admixtures & plasticizers per ASTM C 260-86 & C 494-92.
- [4] Reinforcing - 3 x 8 wire mesh, ASTM A185

MBI
Mayer Bros., Inc.

6264 Race Road
Elkridge, Maryland 21075
Tel. 410.796.1434
Fax. 410.796.1438
www.mayerbrosprecast.com

**Standard Vaults & Risers
Stock Item**

Approx. Wts. - See Above

Dwg. No. STD-VLTS

No Scale

March 7, 2002